


Product Datasheet

Playset PZA R1042

Aluminium round
profile
Ø89 mm

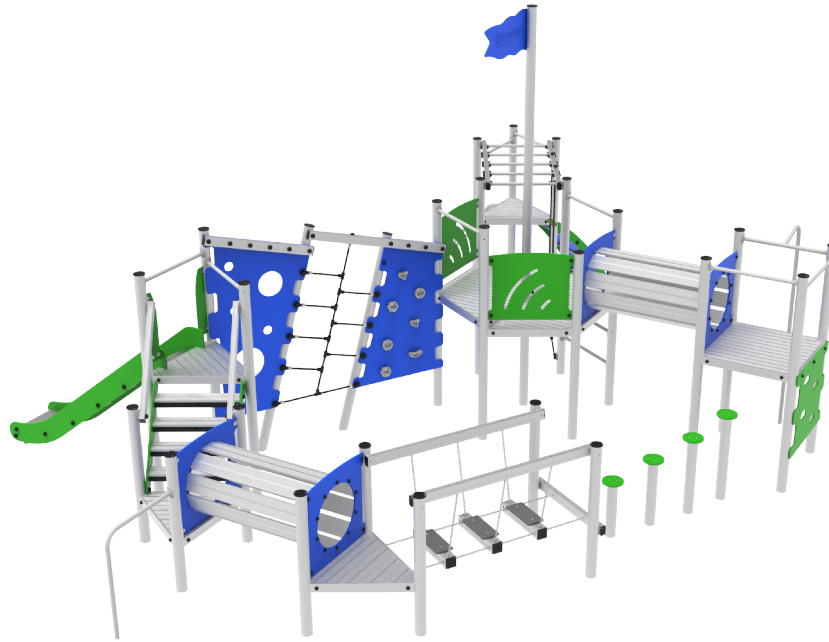

The set contains:

1. Tower with square platform without roof - 1 pcs
2. Tower with hexagonal platform without roof - 1 pcs
3. Tower with triangular platform without roof - 4 pcs
4. Arch Climbing Wall - 1 pcs
5. Fireman's pipe - 1 pcs
6. Stairs - 1 pcs
7. Slide Pipe h=120cm - 1 pcs
8. Slide h=120 cm - 1 pcs
9. Horizontal Ladder - 1 pcs
10. Tunnel bridge - 2 pcs
11. Ladder - 1 pcs
12. Chains Bridge - 1 pcs
13. Steps - 1 pcs
14. Exercise Bar - 1 pcs
15. Vertical wall with rope elements - 1 pcs
16. Climbing wall - 1 pcs
17. Climbing ropes - 1 pcs

Age: 5+




Safety zone: 1012 cm x 1129 cm

Safety zone area: 72,7 m²

Free fall height: 220 cm

Spare parts availability: YES

Product compliant with
PN-EN 1176-1:2017,
PE-EN 1176-3:2017: YES

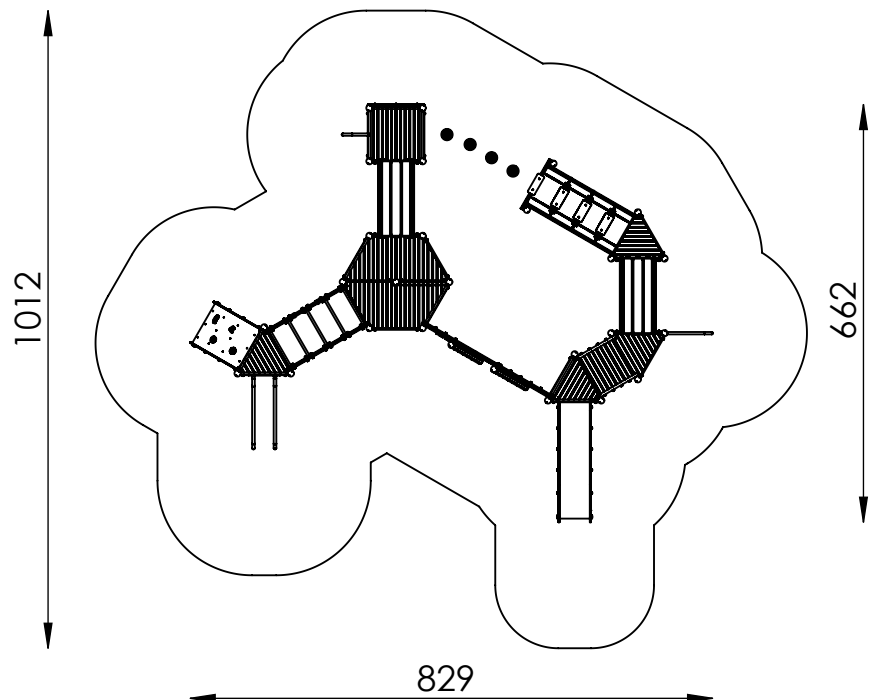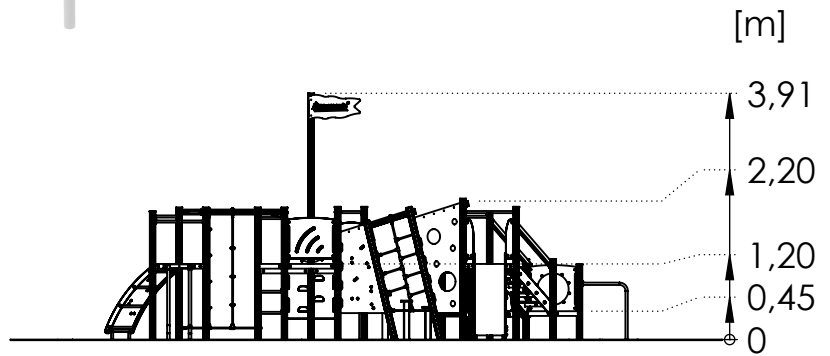

Mounting:

The set is mounted in the ground.
Foundations made of C20/25 concrete.

In sets containing a slide, pay attention to the location in relation to the directions of the world because the sun heats the slide. The slide should not be mounted to the south.

Acceptable shock absorbing surfaces and their minimum thickness

| Material ^a | Description [mm] | Minimum depth ^b [cm] | Maximum free heights of fall [cm] |
|-----------------------------|--------------------------------|---------------------------------|-----------------------------------|
| Turf/topsoil | | - | ≤ 100 ^d |
| Bark | 20 to 80 particle size | 20 | ≤ 200 |
| | | 30 | ≤ 300 |
| Woodchip | 5 to 30 particle size | 20 | ≤ 200 |
| | | 30 | ≤ 300 |
| Sand or gravel ^c | 0,25 to 8 grain size | 20 | ≤ 200 |
| | | 30 | ≤ 300 |
| Other materials | As tested according to EN 1177 | | Critical fall height as tested |

^a For further information on specific material properly prepared for use in children's playgrounds

^b For loose particulate material, add 100 mm to the minimum depth to compensate for displacement (see 4.2.8.5.1).

^c Sand and gravel shall be well rounded and washed to eliminate most of the silt or clay particles. Washed sand and gravel is considered to be from alluvial (natural eroded) deposits and free from most silt or clay particles. For gravel this may commonly be described as 'pea shingle'. Uniformity coefficient $D_{60}/D_{10} < 3,0$. Grain size can be identified by use of a sieve test, as in EN 933-1 (see Annex G)

^d See NOTE 2 in 4.2.8.5.2